Super Slim Underwater LED LIGHT
Süper Slim Havuz Lambası





INSTALLATION AND MAINTENANCE MANUAL
KURULUM VE BAKIM TALİMATI

Version: 1.0

GEMAS


ENGLISH


This guide; It contains basic information about the security measures to be applied for installation and use. Therefore, the person and user to install; should read these instructions carefully before installation and operation. Keep this manual for future reference.

The light should never be operated without a transformer.
No voltage above 12V ± 2V should definitely go to the light.


1. GENERAL SPECIFICATIONS


- **Application:** Universal design for easy installation in all swimming pool structures.
- **Protection Class:** IP68 waterproof rating at a nominal depth of 2 meters.
- **Materials:** White ABS frame, niche, and high-impact polycarbonate (PC) lamp body.
- **Electronics:** Epoxy-based PCB components ensuring chemical and thermal resistance.
- **Installation:** Wall-mounted configuration with a body depth of approximately 8.5 cm.
- **Backward Compatibility:** Retrofit lamp body (excluding niche) fully compatible with existing Standard 2002 and Standard 95 niches.
- **Wire Connection:** Supplied with 2 x 0.75 mm² or 2 x 1.5 mm² cables depending on fixture power.

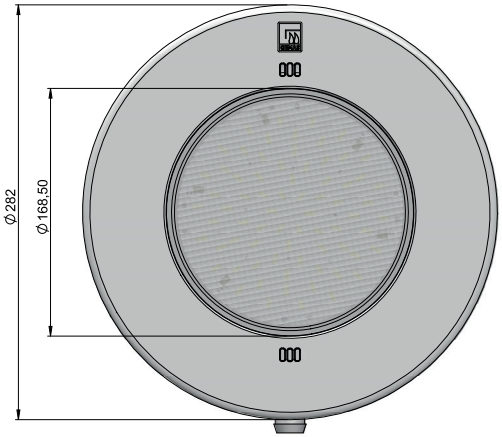


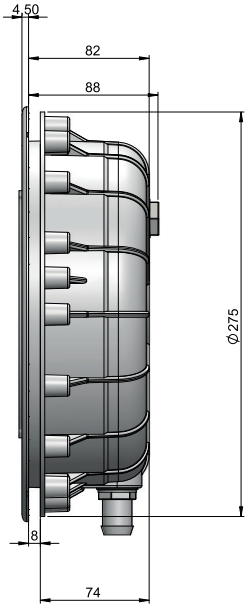


Ambient temperature should be maximum 30°C.
Changes in ambient temperature and product temperature alter current and light intensity values.

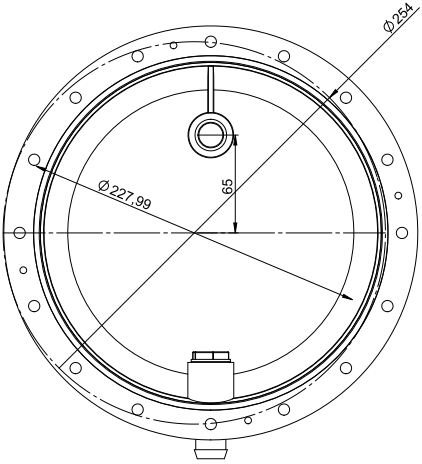

Ø254
Ø227,99
65

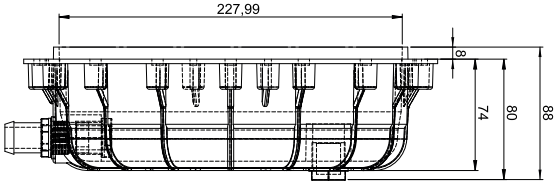

227,99
8
74
80
88

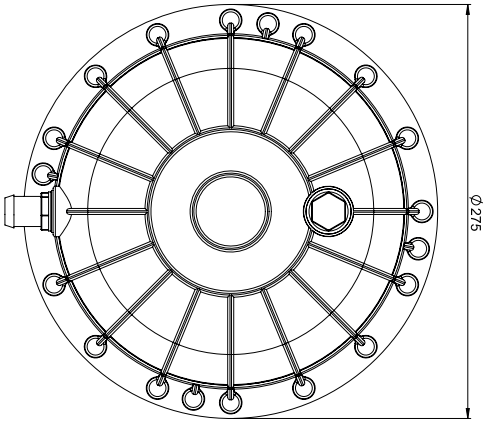
Ø275


2002 and Superslim Niche

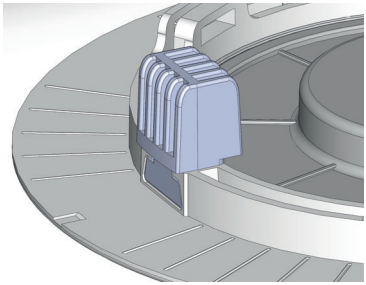


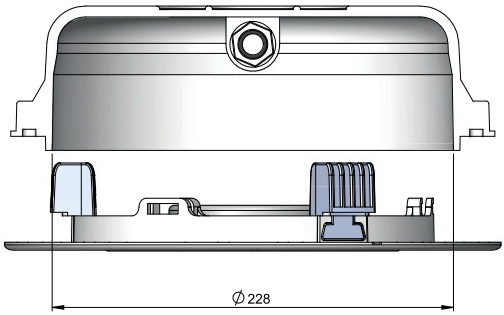

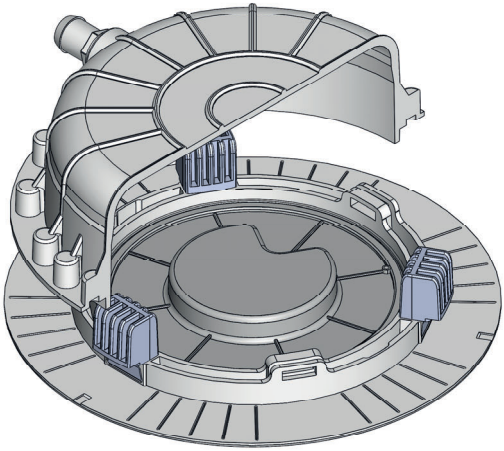



Adjustable bracket for Slim LED Lights







Mounting SUPERSLIM With STANDART 95 Niche

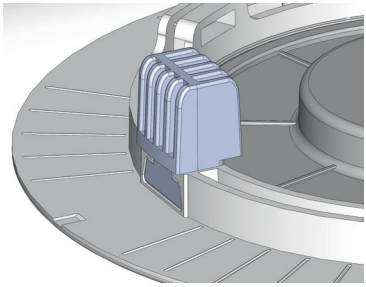


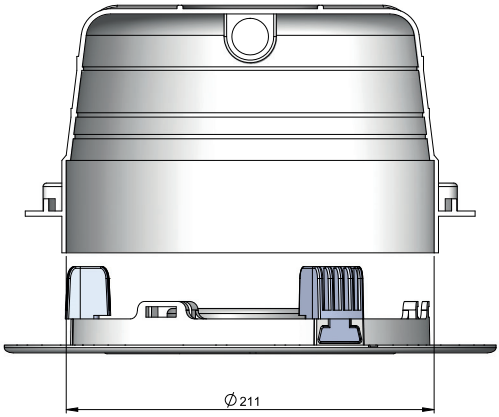

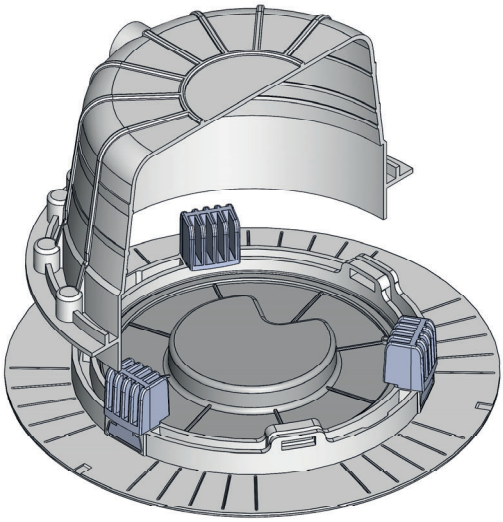


Adjustable bracket for Slim LED Lights






SUPERSLIM CONCRETE EXPLODED VIEW

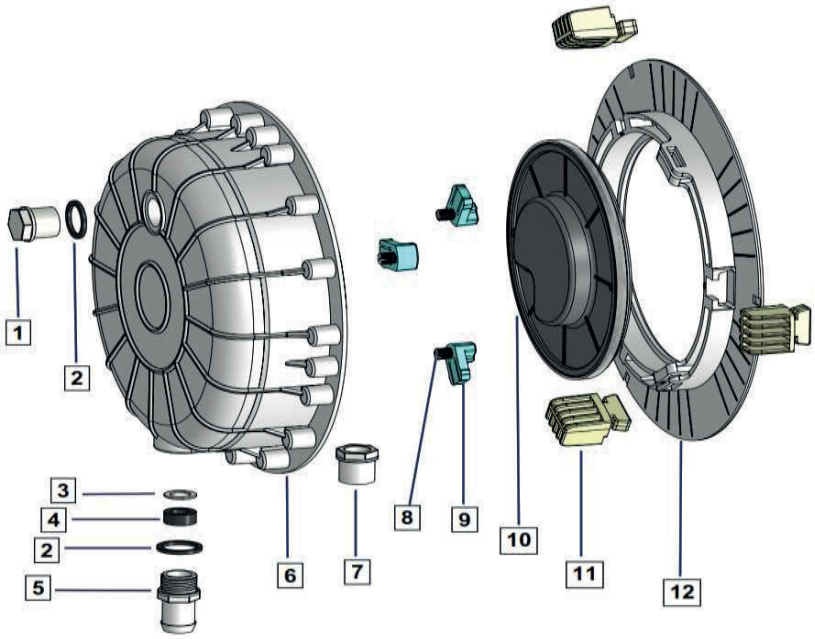

	GEMAS CODE	English Description
1	05111112	Underwater Light Blanking Plug (Single-sided closed, single-sided threaded)
2	860099	Std. Light Hose Connection Gasket Ø22xØ27x2.5
3	05211115	Light 2x1.5 Cable Compression Washer
4	860594 860382	Cable Gland Gasket Ø20xØ6.5x8.5 (60-65Sh) 2x0.75 New Type Cable Gland Gasket Ø20xØ8/Ø18x8/5.5 (For 2x1.5 Cable)
5	05111111	Light Hose Connection Nut
6	05140001	Super Slim LED Light Niche - Concrete Type
7	8500498	Light Cable Compression Nut (Gland Nut)
8	0511004	Slim LED Bracket Screw
9	05140003	Super Slim LED Mounting Bracket
10	Please contact our sales team for support	
11	05140004	Super Slim LED Mounting Wedge (Spacer)
12	05140002	Super Slim LED Faceplate / Trim Ring

SUPERSLIM LINER EXPLODED VIEW

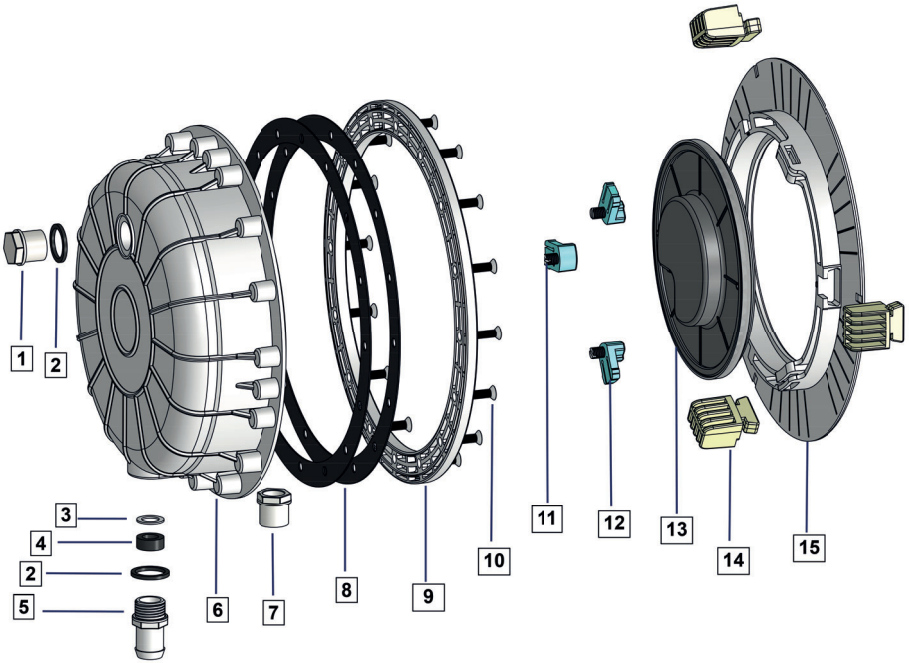

	GEMAS CODE	English Description
1	05111112	Underwater Light Blanking Plug (Single-sided closed, single-sided threaded)
2	860099	Std. Light Hose Connection Gasket Ø22xØ27x2.5
3	05211115	Light 2x1.5 Cable Compression Washer
4	860594 860382	Cable Gland Gasket Ø20xØ6.5x8.5 (60-65Sh) 2x0.75 New Type Cable Gland Gasket Ø20xØ8/Ø18x8/5.5 (For 2x1.5 Cable)
5	05111111	Light Hose Connection Nut
6	05240001B	Super Slim LED Light Niche Pre-wound - Liner Type
7	8500498	Light Cable Compression Nut (Gland Nut)
8	860467	Std. 2002-2004 Model Large Light Flange Gasket Ø273xØ236.5x2.2
9	05240002	Super Slim LED Light Flange
10	8500014	M6x20 Countersunk Head Screw DIN965 AISI 304 Stainless Steel
11	0511004	Slim LED Bracket Screw
12	05140003	Super Slim LED Mounting Bracket
13	Please contact our sales team for support	
14	05140004	Super Slim LED Mounting Wedge (Spacer)
15	05140002	Super Slim LED Faceplate / Trim Ring

SUPER SLIM SMD 252 Series			
Pool Type	**Color**	**Code**	**Product Description**
CONCRETE	White	051400-051140L	Super Slim LED With Niche 252 SMD LED White Complete 12V AC/DC 50W
CONCRETE	Daylight	051400-051141L	Super Slim LED With Niche 252 SMD LED Daylight Complete 12V AC/DC 50W
CONCRETE	Turquoise	051400-051142L	Super Slim LED With Niche 252 SMD LED Turquoise Complete 12V AC/DC 36W
CONCRETE	Blue	051400-051143L	Super Slim LED With Niche 252 SMD LED Blue Complete 12V AC/DC 36W
CONCRETE	Red	051400-051144L	Super Slim LED With Niche 252 SMD LED Red Complete 12V AC/DC 36W
CONCRETE	Green	051400-051145L	Super Slim LED With Niche 252 SMD LED Green Complete 12V AC/DC 36W
CONCRETE	RGB Built-in	051400-051153L	Super Slim LED With Niche 252 SMD LED RGB Built-in Control Complete 12V AC/DC 36W
CONCRETE	RGB Central	051400-051155L	Super Slim LED With Niche 252 SMD LED RGB Central Control Complete 12V DC 36W
LINER	White	052400-051140L	Super SlimLED Liner With Niche 252 SMD LED White Complete 12V AC/DC 50W
LINER	Daylight	052400-051141L	Super SlimLED Liner With Niche 252 SMD LED Daylight Complete 12V AC/DC 50W
LINER	Turquoise	052400-051142L	Super SlimLED Liner With Niche 252 SMD LED Turquoise Complete 12V AC/DC 36W
LINER	Blue	052400-051143L	Super SlimLED Liner With Niche 252 SMD LED Blue Complete 12V AC/DC 36W
LINER	Red	052400-051144L	Super SlimLED Liner With Niche 252 SMD LED Red Complete 12V AC/DC 36W
LINER	Green	052400-051145L	Super SlimLED Liner With Niche 252 SMD LED Green Complete 12V AC/DC 36W
LINER	RGB Built-in	052400-051153L	Super SlimLED Liner With Niche 252 SMD LED RGB Built-in Control Complete 12V AC/DC 36W
LINER	RGB Central	052400-051155L	Super SlimLED Liner With Niche 252 SMD LED RGB Central Control Complete 12V DC 36W

SUPER SLIM SMD 90 Series			
Pool Type	**Color**	**Code**	**Product Description**
BETON	RGB Built-in	051400-051150L	Super Slim LED With Niche 90 SMD LED RGB Built-in Control Complete 12V AC/DC 36W
BETON	RGB Central	051400-051152L	Super Slim LED With Niche 90 SMD LED RGB Central Control Complete 12V DC 36W
LINER	RGB Built-in	052400-051150L	Super SlimLED Liner With Niche 90 SMD LED RGB Built-in Control Complete 12V AC/DC 36W
LINER	RGB Central	052400-051152L	Super SlimLED Liner With Niche 90 SMD LED RGB Central Control Complete 12V DC 36W

SUPER SLIM SMD 81 Series			
Pool Type	**Color**	**Code**	**Product Description**
CONCRETE	White	051400-051130L	Super Slim LED With Niche 81 SMD LED White Complete 12V AC/DC 35W
CONCRETE	Daylight	051400-051131L	Super Slim LED With Niche 81 SMD LED Daylight Complete 12V AC/DC 35W
CONCRETE	Turquoise	051400-051132L	Super Slim LED With Niche 81 SMD LED Turquoise Complete 12V AC/DC 30W
CONCRETE	Blue	051400-051133L	Super Slim LED With Niche 81 SMD LED Blue Complete 12V AC/DC 30W
CONCRETE	Red	051400-051134L	Super Slim LED With Niche 81 SMD LED Red Complete 12V AC/DC 30W
CONCRETE	Green	051400-051135L	Super Slim LED With Niche 81 SMD LED Green Complete 12V AC/DC 30W
CONCRETE	RGB Built-in	051400-051156L	Super Slim LED With Niche 81 SMD LED RGB Built-in Control Complete 12V AC/DC 30W
CONCRETE	RGB Central	051400-051157L	Super Slim LED With Niche 81 SMD LED RGB Central Control Complete 12V DC 30W
LINER	White	052400-051130L	Super SlimLED Liner With Niche 81 SMD LED White Complete 12V AC/DC 35W
LINER	Daylight	052400-051131L	Super SlimLED Liner With Niche 81 SMD LED Daylight Complete 12V AC/DC 35W
LINER	Turquoise	052400-051132L	Super SlimLED Liner With Niche 81 SMD LED Turquoise Complete 12V AC/DC 30W
LINER	Blue	052400-051133L	Super SlimLED Liner With Niche 81 SMD LED Blue Complete 12V AC/DC 30W
LINER	Red	052400-051134L	Super SlimLED Liner With Niche 81 SMD LED Red Complete 12V AC/DC 30W
LINER	Green	052400-051135L	Super SlimLED Liner With Niche 81 SMD LED Green Complete 12V AC/DC 30W
LINER	RGB Built-in	052400-051156L	Super SlimLED Liner With Niche 81 SMD LED RGB Built-in Control Complete 12V AC/DC 30W
LINER	RGB Central	052400-051157L	Super SlimLED Liner With Niche 81 SMD LED RGB Central Control Complete 12V DC 30W

SUPER ECO SLIM 72 Series			
Pool Type	**Color**	**Code**	**Product Description**
CONCRETE	White	051400-051130ER	Super Eco SlimLED With Niche 72 SMD LED White Complete 12V AC/DC 16W
CONCRETE	Daylight	051400-051131ER	Super Eco SlimLED With Niche 72 SMD LED Daylight Complete 12V AC/DC 16W
CONCRETE	Turquoise	051400-051132ER	Super Eco SlimLED With Niche 72 SMD LED Turquoise Complete 12V AC/DC 15W
CONCRETE	Blue	051400-051133ER	Super Eco SlimLED With Niche 72 SMD LED Blue Complete 12V AC/DC 15W
CONCRETE	Red	051400-051134ER	Super Eco SlimLED With Niche 72 SMD LED Red Complete 12V AC/DC 15W
CONCRETE	Green	051400-051135ER	Super Eco SlimLED With Niche 72 SMD LED Green Complete 12V AC/DC 15W
CONCRETE	RGB Built-in	051400-051150ER	Super Eco SlimLED With Niche 72 SMD LED RGB Built-in Control Complete 12V AC/DC 15W
CONCRETE	RGB Central	051400-051152ER	Super Eco SlimLED With Niche 72 SMD LED RGB Central Control Complete 12V DC 15W
LINER	White	052400-051130ER	Super Eco SlimLED Liner With Niche 72 SMD LED White Complete 12V AC/DC 16W
LINER	Daylight	052400-051131ER	Super Eco SlimLED Liner With Niche 72 SMD LED Daylight Complete 12V AC/DC 16W
LINER	Turquoise	052400-051132ER	Super Eco SlimLED Liner With Niche 72 SMD LED Turquoise Complete 12V AC/DC 15W
LINER	Blue	052400-051133ER	Super Eco SlimLED Liner With Niche 72 SMD LED Blue Complete 12V AC/DC 15W
LINER	Red	052400-051134ER	Super Eco SlimLED Liner With Niche 72 SMD LED Red Complete 12V AC/DC 15W
LINER	Green	052400-051135ER	Super Eco SlimLED Liner With Niche 72 SMD LED Green Complete 12V AC/DC 15W
LINER	RGB Built-in	052400-051150ER	Super Eco SlimLED Liner With Niche 72 SMD LED RGB Built-in Control Complete 12V AC/DC 15W
LINER	RGB Central	052400-051152ER	Super Eco SlimLED Liner With Niche 72 SMD LED RGB Central Control Complete 12V DC 15W

2. Use and Color Changing

The lamp is energized (12VAC / DC) after making sure that the installation and electrical connection is done correctly. There is no color changing and color transition feature in single color lamps. Color changing and transition of RGB lamps (within 3 seconds) is provided by cutting off the energy and re-energizing. This process is repeated and different colors and animations are performed. Thanks to the GEMAŞ 2T RGB Lamp Control units designed for this process, it can be made very comfortably and with a remote control.

2.1. RGB Light Mode List

RGB Light Has 13 Different Lighting Patterns Detailed Below:

● Red ● Green ● Blue ● Red and Green ● Red and Blue ● Blue and Green ● Red Green Blue
● Light Conversion ● 256 Color Tone Changing ● Flashing ● Seven Intermediate Color Tones
● Sixteen Color Change ● Single Color Change

2.2. Multiple Light Synchronization

Check the lights after connecting and activating all RGB lights. Make sure all lights work in different colors. Turn off the power and turn it back on after 4-7 seconds. After this process, all RGB lights will turn to the first light pattern (RED). By using the color changing function (by cutting the energy and re-energizing within 3 seconds), you can use all RGB lights in any color or animation you desire.

3. MAINTENANCE

There is no need for any maintenance for this lamp. If there is a deterioration, it must be replaced. Make sure the lamp is de-energized before any operation. Make sure that the new lamp is the same model and feature as the replaced lamp.


4. GUARANTEE

The manufacturer warrants this light against manufacturing defects and material defects for a period of 2 years from the date of purchase. This warranty does not cover damage caused by misuse, accidental damage, failures arising from the installation of unauthorized persons and does not assume direct liability.



Instant On









Bu kılavuz; kurulum ve kullanım için uygulanacak güvenlik önlemlerine ilişkin temel bilgileri içerir. Bu nedenle kurulumu yapacak kişi ve kullanıcı; kurulum ve kullanım öncesi bu talimatları dikkatlice okumalıdır. Bu kılavuzu ileride başvurmak üzere saklayınız.

Lamba kesinlikle transformatör olmadan çalıştırılmamalıdır.
Lambaya kesinlikle 12V ±2V üzeri voltaj gitmemelidir.


1. GENEL ÖZELLİKLER


- **Uygulama Alanı:** Tüm yüzme havuzu yapılarına uyumlu, kolay montaj tasarımı.
- **Koruma Sınıfı:** Standart olarak 2 metre nominal derinlikte IP68 su sızdırmazlık derecesi.
- **Yapısal Malzeme:** Beyaz ABS çerçeve, koruyucu kovan ve yüksek mekanik mukavemete sahip polikarbonat (PC) lamba gövdesi.
- **Elektronik Altyapı:** Kimyasal ve termal dayanıklılık sağlayan epoksi bazlı PCB (Baskı Devre Kartı) bileşenleri.
- **Montaj ve Entegrasyon:** Duvar montajına uygun yapı ve yaklaşık 8,5 cm gövde derinliği.
- **Geriye Dönük Uyumluluk:** Kovan hariç lamba gövdesinin, mevcut Standart 2002 ve Standart 95 lamba kovanlarına tam adaptasyonu ve doğrudan entegrasyonu.
- **Kablo Bağlantısı:** Armatür gücüne bağlı olarak 2 x 0.75 mm² veya 2 x 1.5 mm² kesitli kablo ile sevk.

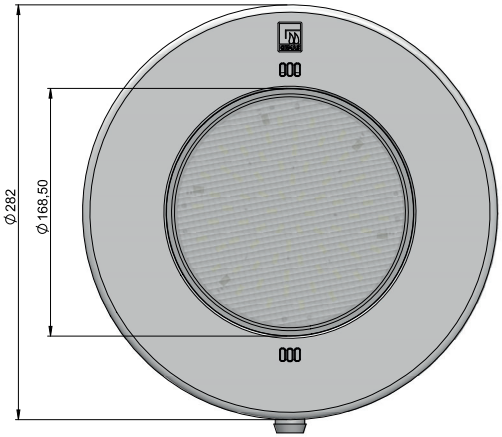


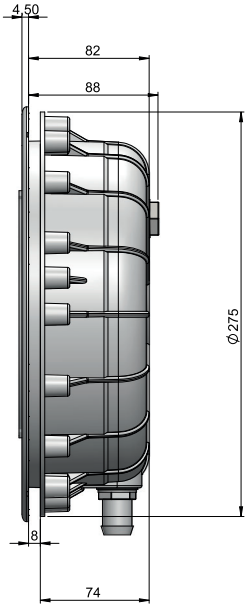


Ortam sıcaklığı maksimum 30°C olmalıdır.
Ortam sıcaklığı ve ürün sıcaklığındaki değişiklik akım ve ışık şiddeti değerlerini değiştirmektedir.

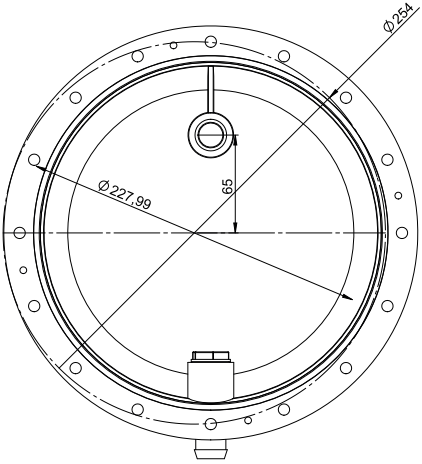

Ø254
Ø227,99
65

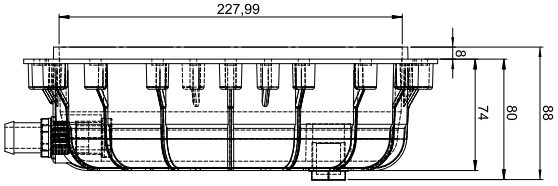

227,99
8
74
80
88

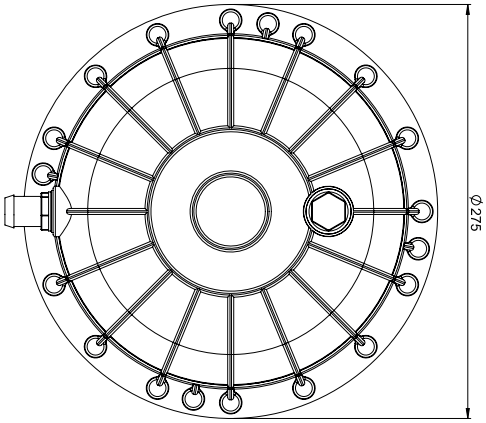
Ø275


2002 VE SÜPERSLİM KOVAN İLE MONTAJI

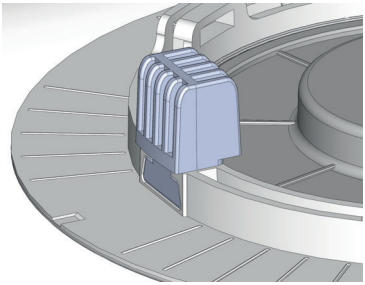


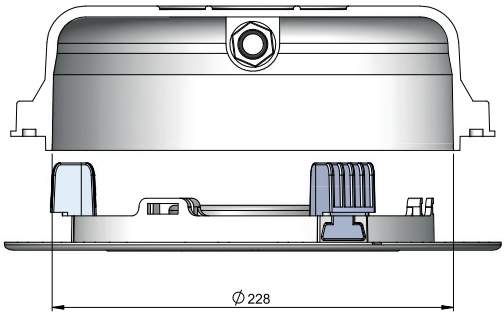

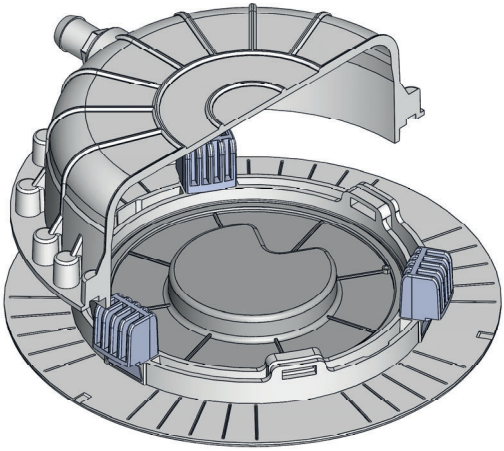



Slim LED Lambalarımızla uyumlu braket







95 STANDART KOVAN İLE MONTAJI

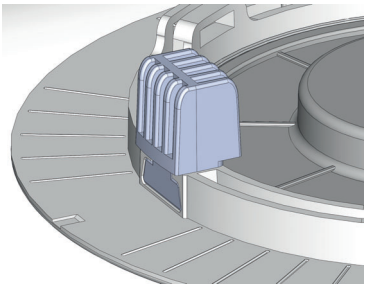


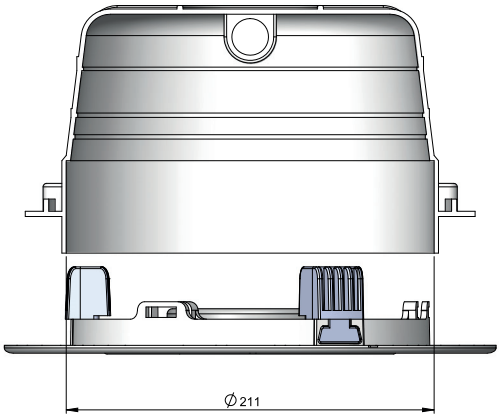

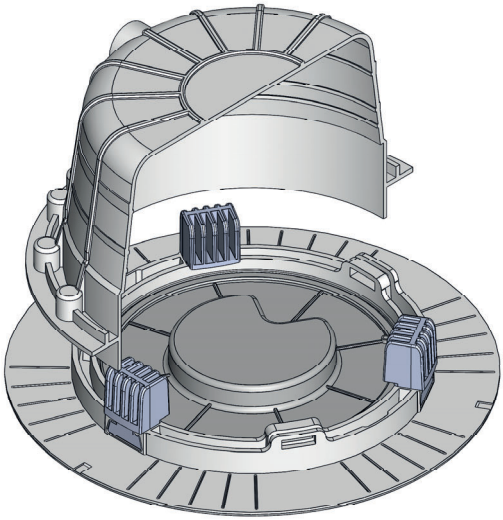


Slim LED Lambalarımızla uyumlu braket






SÜPERSLİM BETON PATLATILMIŞ GÖRÜNTÜSÜ

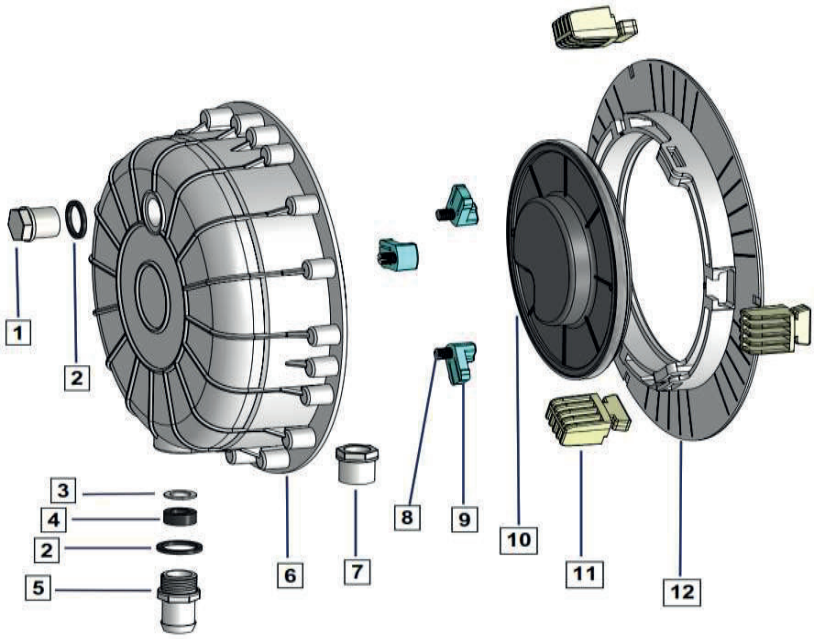

	KOD	TANIMI
1	05111112	Lamba Kör Tapası tek tarafı kapalı tek taraf dişli
2	860099	Std Lamba Hortum Bağlantı Contası Ø22xØ27x2,5
3	05211115	Lamba 2X1,5 Kablo Sıkma Pulu
4	860594 860382	Kablo Boğma Contası Ø20xØ6,5x8,5 (60-65Sh) 2x0,75 Yeni Tip Kablo Boğma Contası Ø20xØ8/Ø18x8/5,5 (2X1,5 KABLO İÇİN)
5	05111111	Lamba Hortum Bağlantı Somunu*
6	05140001	Süper Slim Led Kovanı - Beton
7	8500498	Lamba Kablo Sıkma Somunu
8	0511004	Slim Led braket vidası
9	05140003	Süper Slim Led Sabitleme Braketi
10	Satış temsilcilerinden destek alabilirsiniz.	
11	05140004	Süper Slim Led Sabitleme Takozu
12	05140002	Süper Slim Led Çerçeve

SÜPER SLİM LİNER PATLATILMIŞ GÖRÜNTÜSÜ

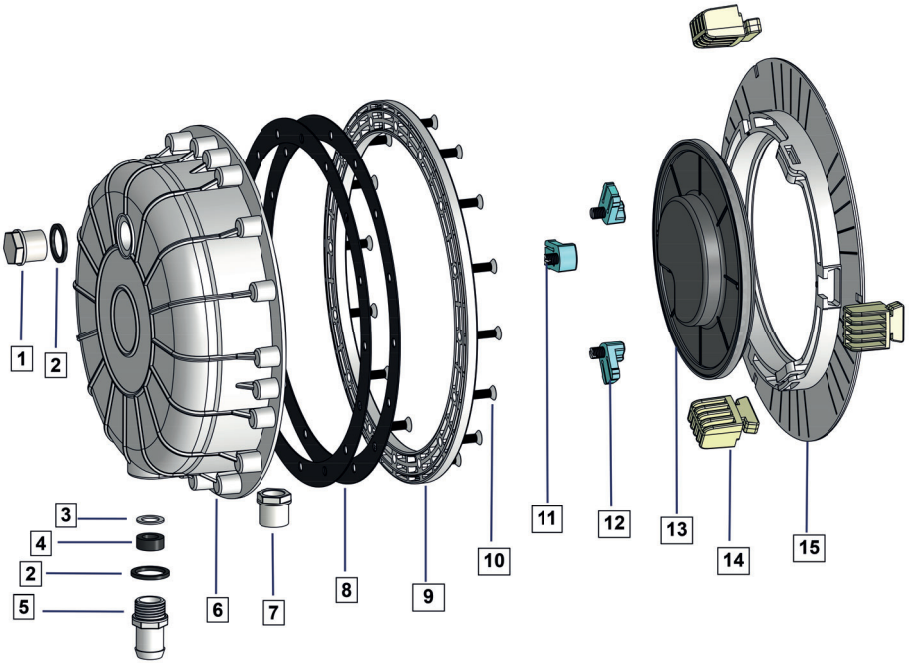

	KODU	TANIMI
1	05111112	Lamba Kör Tapası tek tarafı kapalı tek taraf dişli
2	860099	Std Lamba Hortum Bağlantı Contası Ø22xØ27x2,5
3	05211115	Lamba 2X1,5 Kablo Sıkma Pulu
4	860594 860382	Kablo Boğma Contası Ø20xØ6,5x8,5 (60-65Sh) 2x0,75 Yeni Tip Kablo Boğma Contası Ø20xØ8/Ø18x8/5,5 (2X1,5 KABLO İÇİN)
5	05111111	Lamba Hortum Bağlantı Somunu*
6	05240001B	Süper Slim Led Kovanı Sarılı - Liner
7	8500498	Lamba Kablo Sıkma Somunu
8	860467	Std.2002-2004 M. Büyük L.Flanş ContØ273xØ236,5x2,2
9	05240002	Süper Slim Led Flanşı
10	8500014	M6x20 YHB Cıvata DIN965 AISI 304 Inox
11	0511004	Slim Led braket vidası
12	05140003	Süper Slim Led Sabitleme Braketi
13	Satış temsilcilerinden destek alabilirsiniz.	
14	05140004	Süper Slim Led Sabitleme Takozu
15	05140002	Süper Slim Led Çerçeve

SÜPER SLİM SMD 252 Serisi			
Havuz Tipi	**Renk**	**Ürün Kodu**	**Ürün Açıklaması**
BETON	BEYAZ	051400-051140L	Süper Slim Led Kovanlı 252 SMD Led Beyaz Komple
BETON	G.IŞIĞI	051400-051141L	Süper Slim Led Kovanlı 252 SMD Led G.Işığı Komple
BETON	TURKUAZ	051400-051142L	Süper Slim Led Kovanlı 252 SMD Led Turkuaz Komple
BETON	MAVİ	051400-051143L	Süper Slim Led Kovanlı 252 SMD Led Mavi Komple
BETON	KIRMIZI	051400-051144L	Süper Slim Led Kovanlı 252 SMD Led Kırmızı Komple
BETON	YEŞİL	051400-051145L	Süper Slim Led Kovanlı 252 SMD Led Yeşil Komple
BETON	RGB K.E	051400-051153L	Süper Slim Led Kovanlı 252 SMD Led RGB K.E. Komple
BETON	RGB M.E	051400-051155L	Süper Slim Led Kovanlı 252 SMD Led RGB M.E. Komple
LİNER	BEYAZ	052400-051140L	Süper SlimLed Liner Kovanlı 252 SMD Led Beyaz Komp
LİNER	G.IŞIĞI	052400-051141L	Süper SlimLed Liner Kovanlı 252 SMD Led G.Işığı Komp
LİNER	TURKUAZ	052400-051142L	Süper SlimLed Liner Kovanlı 252 SMD Led Turkuaz Komp
LİNER	MAVİ	052400-051143L	Süper SlimLed Liner Kovanlı 252 SMD Led Mavi Komp
LİNER	KIRMIZI	052400-051144L	Süper SlimLed Liner Kovanlı 252 SMD Led Kırmızı Komp
LİNER	YEŞİL	052400-051145L	Süper SlimLed Liner Kovanlı 252 SMD Led Yeşil Komp
LİNER	RGB K.E	052400-051153L	Süper SlimLed Liner Kovanlı 252 SMD Led RGB K.E.Komp
LİNER	RGB M.E	052400-051155L	Süper SlimLed Liner Kovanlı 252 SMD Led RGB M.E.Komp

SÜPER SLİM SMD 90 Serisi			
Havuz Tipi	**Renk**	**Ürün Kodu**	**Ürün Açıklaması**
BETON	RGB K.E	051400-051150L	Süper Slim Led Kovanlı 90 SMD Led RGB K.E. Komple
BETON	RGB M.E	051400-051152L	Süper Slim Led Kovanlı 90 SMD Led RGB M.E. Komple
LİNER	RGB K.E	052400-051150L	Süper SlimLed Liner Kovanlı 90 SMD Led RGB K.E. Komp
LİNER	RGB M.E	052400-051152L	Süper SlimLed Liner Kovanlı 90 SMD Led RGB M.E. Komp

SÜPER SLİM SMD 81 Serisi			
Havuz Tipi	**Renk**	**Ürün Kodu**	**Ürün Açıklaması**
BETON	BEYAZ	051400-051130L	Süper Slim Led Kovanlı 81 SMD Led Beyaz Komple
BETON	G.IŞIĞI	051400-051131L	Süper Slim Led Kovanlı 81 SMD Led G.Işığı Komple
BETON	TURKUAZ	051400-051132L	Süper Slim Led Kovanlı 81 SMD Led Turkuaz Komple
BETON	MAVİ	051400-051133L	Süper Slim Led Kovanlı 81 SMD Led Mavi Komple
BETON	KIRMIZI	051400-051134L	Süper Slim Led Kovanlı 81 SMD Led Kırmızı Komple
BETON	YEŞİL	051400-051135L	Süper Slim Led Kovanlı 81 SMD Led Yeşil Komple
BETON	RGB K.E	051400-051156L	Süper Slim Led Kovanlı 81 SMD Led RGB K.E.Komple
BETON	RGB M.E	051400-051157L	Süper Slim Led Kovanlı 81 SMD Led RGB M.E.Komple
LİNER	BEYAZ	052400-051130L	Süper SlimLed Liner Kovanlı 81 SMD Led Beyaz Komp
LİNER	G.IŞIĞI	052400-051131L	Süper SlimLed Liner Kovanlı 81 SMD Led G.Işığı Komp
LİNER	TURKUAZ	052400-051132L	Süper SlimLed Liner Kovanlı 81 SMD Led Turkuaz Komp
LİNER	MAVİ	052400-051133L	Süper SlimLed Liner Kovanlı 81 SMD Led Mavi Komp
LİNER	KIRMIZI	052400-051134L	Süper SlimLed Liner Kovanlı 81 SMD Led Kırmızı Komp
LİNER	YEŞİL	052400-051135L	Süper SlimLed Liner Kovanlı 81 SMD Led Yeşil Komp
LİNER	RGB K.E	052400-051156L	Süper SlimLed Liner Kovanlı 81 SMD Led RGB K.E.Komp
LİNER	RGB M.E	052400-051157L	Süper SlimLed Liner Kovanlı 81 SMD Led RGB M.E.Komp

SÜPER ECO SLİM 72 Serisi			
Havuz Tipi	**Renk**	**Ürün Kodu**	**Ürün Açıklaması**
BETON	BEYAZ	051400-051130ER	Süper Eco SlimLed Kovanlı 72 SMD Led Beyaz Komple
BETON	G.IŞIĞI	051400-051131ER	Süper Eco SlimLed Kovanlı 72 SMD Led G.Işığı Komple
BETON	TURKUAZ	051400-051132ER	Süper Eco SlimLed Kovanlı 72 SMD Led Turkuaz Komple
BETON	MAVİ	051400-051133ER	Süper Eco SlimLed Kovanlı 72 SMD Led Mavi Komple
BETON	KIRMIZI	051400-051134ER	Süper Eco SlimLed Kovanlı 72 SMD Led Kırmızı Komple
BETON	YEŞİL	051400-051135ER	Süper Eco SlimLed Kovanlı 72 SMD Led Yeşil Komple
BETON	RGB K.E	051400-051150ER	Süper Eco SlimLed Kovanlı 72 SMD Led RGB K.E. Komp
BETON	RGB M.E	051400-051152ER	Süper Eco SlimLed Kovanlı 72 SMD Led RGB M.E. Komp
LİNER	BEYAZ	052400-051130ER	Süper Eco SlimLed Liner Kovan 72 SMD Led Beyaz Komp
LİNER	G.IŞIĞI	052400-051131ER	Süper Eco SlimLed Liner Kovan 72 SMD Led G.Işığı K.
LİNER	TURKUAZ	052400-051132ER	Süper Eco SlimLed Liner Kovan 72 SMD Led Turkuaz K.
LİNER	MAVİ	052400-051133ER	Süper Eco SlimLed Liner Kovan 72 SMD Led Mavi Kmp
LİNER	KIRMIZI	052400-051134ER	Süper Eco SlimLed Liner Kovan 72 SMD Led Kırmızı K.
LİNER	YEŞİL	052400-051135ER	Süper Eco SlimLed Liner Kovan 72 SMD Led Yeşil K.
LİNER	RGB K.E	052400-051150ER	Süper Eco SlimLed Liner Kovan 72 SMD Led RGB K.E.
LİNER	RGB M.E	052400-051152ER	Süper Eco SlimLed Liner Kovan 72 SMD Led RGB M.E.

2. Kullanım ve Renk Değiştirme

Montaj ve elektriksel bağlantı işleminin doğru yapıldığına emin olduktan sonra lambaya enerji verilir (12V AC/DC). Tek renk lambalarda renk değiştirme ve renk geçişi özelliği bulunmamaktadır. RGB lambalarda renk değiştirme ve geçişi (3 saniye içerisinde) enerjinin kesilip tekrar enerji verilmesiyle sağlanır. Bu işlem tekrarlanarak farklı renkler ve animasyonlar gerçekleştirilir. Bu işlem için tasarlanmış GEMAŞ 2T RGB Lamba Kontrol üniteleri sayesinde çok rahat bir şekilde ve uzaktan kumanda ile yapılabilmektedir.

2.1. RGB Işık Modu Listesi

RGB Lamba 13 farklı ışık modeline sahiptir:
● Kırmızı ● Yeşil ● Mavi ● Kırmızı ve Yeşil ● Kırmızı ve Mavi ● Mavi ve Yeşil ● Kırmızı Yeşil Mavi ● Işık Dönüştürme ● 256 Renk Tonu Değiştirme ● Yanıp Sönme ● Yedi Ara Renk Tonu ● On Altı Renk Değişimi ● Tek Renk Değiştirme

2.2. Çoklu Lamba Senkronizasyonu

Tüm RGB lambaları bağlayıp devreye aldıktan sonra lambaları kontrol edin. Tüm lambaların farklı renklerde de olsa çalıştığından emin olun. Enerjiyi kapatın ve 4-7 saniye sonra tekrar enerjiyi açın. Bu işlem sonrası tüm RGB lambalar ilk ışık modeline (KIRMIZI) dönecektir. Renk değiştirme fonksiyonunu kullanarak (3 saniye içerisinde enerjinin kesilip tekrar enerji verilmesiyle), tüm RGB lambaları istenilen renk veya animasyonda kullanabilirsiniz.

3. BAKIM

Bu lamba için herhangi bir bakıma gerek yoktur. Eğer bir bozulma olursa değişimi gerekmektedir. Herhangi işlemden önce lambanın enerjisinin kesik olduğundan emin olun. Yeni lambanın değiştirilen lamba ile aynı model ve özellikte olduğundan emin olun.


4. GARANTİ

Üretici bu lambayı satın alma tarihinden itibaren 2 yıl boyunca imalat hatalarına ve malzeme bozulmalarına karşı garanti eder. Bu garanti hatalı kullanım nedeniyle oluşan hasarı, kazara olan hasarı, yetkisiz kimselerin montajından kaynaklı arızaları kapsamaz ve doğrudan sorumluluk üstlenmez.



Instant On









• *We reserve to change all of the articles or contents of this document, without prior notice.*
• *Firmamız bu belgenin içeriğinde haber vermeksizin değişlikler yapabilir.*