

FiltrOne®



Sand Filters For Swimming Pools



Quality Management System



- **Filtrone Filters are made in PE plastic.**
- **One piece body gives extra strength to pressure fluctuations. Extra strong lid connections are provided by means of stainless steel bolts flanged together.**
- **Fitted with collector and collector arms made of PVC or ABS.**
- **Fitted with pressure gauge, manual air vent cock and manual water drain cock.**
- **Selector valve with "Filter, wash, rinse, recirculate, waste and closed" positions.**
- **Maximum working pressure 2 kg/cm²**
- **Testing pressure 3,5 kg/cm²**
- **Optional large lid (Ø 500 mm) facilitates easy access to filter.**
- **High-bed options with bed depth of 100 cm and side manhole.**

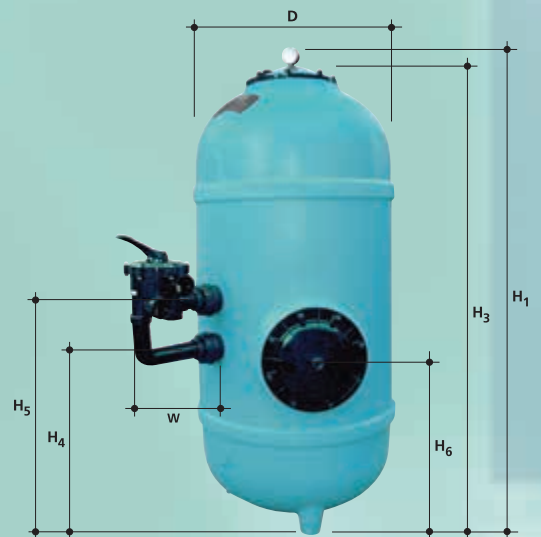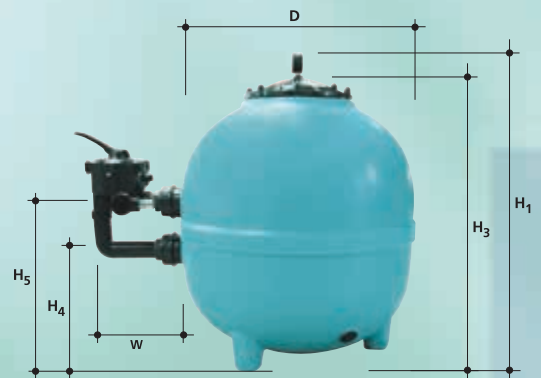

TECHNICAL CHARACTERISTICS

MODEL	FLT 615LL	FLT 615	FLT 760	FLT 920	FLT 615LH	FLT 615HB	FLT 615LHB
D (mm)	615	615	760	920	615	615	615
H ₁ (mm)	820	805	945	1085	1060	1500	1530
H ₃ (mm)	760	745	885	1025	1000	1440	1460
H ₄ (mm)	260	270	350	570	580	580	580
H ₅ (mm)	410	420	500	420	410	720	720
W (mm)	260	260	295	295	260	260	260
CONNECTIONS (Ø)	1 1/2"	1 1/2"	2"	2"	1 1/2"	1 1/2"	1 1/2"
FLOW (m ³ /h) (50 m ² /h/m ²)	15	15	22	32	15	15	15
FLOW (m ³ /h) (40 m ² /h/m ²)	12	12	18	27	12	12	12
ANTHRACITE 0,8 - 1,6 mm (Kg)	-	-	-	-	-	200	200
QUARTZ SAND 0,5 - 1 mm (Kg)	125	125	225	425	200	200	200
QUARTZ SAND 1 - 3 mm (Kg)	-	-	-	-	100	150	150
NET WEIGHT (Kg)	23,000	19,500	26,500	37,500	31,000	34,250	37,150
CODE	021813LL	021813	021814	021815	021813LH	021813HB	021813LHB



Quality Management System

We reserve the right to change all or part of the features of the articles or contents of this document, without prior notice.

DISTRIBUTOR: