

FiltrOne®

Sand Filters For Swimming Pools



Quality Management System







- **Filtrone Filters are made in PE plastic.**
- **One piece body gives extra strength to pressure fluctuations. Extra strong lid connections are provided by means of stainless steel bolts flanged together.**
- **Fitted with collector and collector arms made of PVC or ABS.**
- **Fitted with pressure gauge, manual air vent cock and manual water drain cock.**
- **Selector valve with "Filter, wash, rinse, recirculate, waste and closed" positions.**
- **Maximum working pressure 2 kg/cm²**
- **Testing pressure 3,5 kg/cm²**
- **Optional large lid (Ø 500 mm) facilitates easy access to filter.**
- **High-bed options with bed depth of 100 cm and side manhole.**

TECHNICAL CHARACTERISTICS

MODEL	021813LH	021813HB	021813LHB
D (mm)	615	615	615
H ₁ (mm)	1140	1500	1530
H ₃ (mm)	1080	1440	1460
H ₄ (mm)	410	580	580
H ₅ (mm)	280	710	710
W (mm)	260	260	260
CONNECTIONS (Ø)	1 1/2"	1 1/2"	1 1/2"
FLOW (m ³ /h) (50 m ³ /h/m ²)	15	15	15
FLOW (m ³ /h) (40 m ³ /h/m ²)	12	12	12
ANTHRACITE 0,8 - 1,6 mm (lt)	-	200	200
QUARTZ SAND 0,5 - 1 mm (Kg)	200	200	200
QUARTZ SAND 1 - 3 mm (Kg)	100	150	150
NET WEIGHT (Kg)	31,000	34,250	37,150

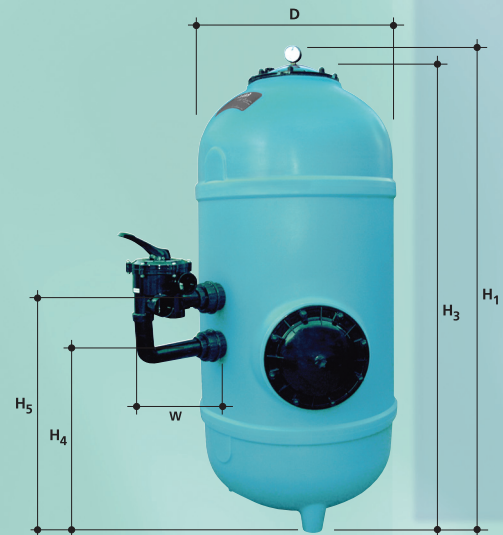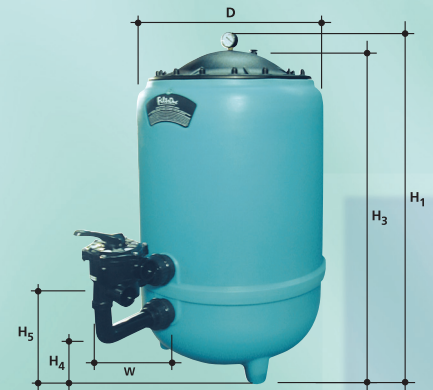

Quality Management System

We reserve the right to change all or part of the features of the articles or contents of this document, without prior notice.

DISTRIBUTOR: