

Injectrone-CL

Plastic Sand Filters for Swimming Pools



Quality Management System







- It is injected of glass reinforced plastic in two parts.
- Upper and lower parts are integrated with stainless steel clamp.
- Since the depth of sand bed is equal to height to lower part, the filter sand can be easily serviced by dismantling the clamp.
- As the bed depth is higher than other filter models, the filtration quality is considerably higher.
- Sand water discharge openings are available at both front and rear, installed w/discharge valve.
- Complete with multi-way valve, fittings, and pressure gauge.
- Five-year body warranty.
- Test pressure 3 kg/cm²
- Maximum operation pressure 2 kg/cm²
- Maximum filtration rate 50 m³/h/m²



The upper and lower parts are integrated with an easy-open stainless steel clamp.




Monoblock filter connections integrated to filter body.

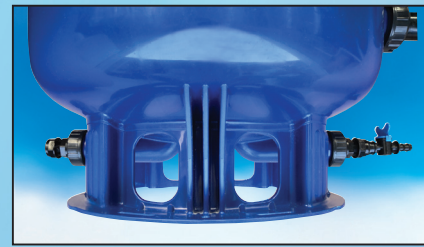

Sand water discharge openings are available at both front and rear, installed with discharge valve.

TECHNICAL CHARACTERISTICS

MODEL	0211111	0211112
D (mm)	500	600
H ₁ (mm)	890	960
H ₂ (mm)	-	-
H ₃ (mm)	840	910
H ₄ (mm)	290	320
H ₅ (mm)	415	445
W (mm)	260	260
CONNECTIONS Ø (mm)	1 1/2"	1 1/2"
FLOW (m ³ /h) (50 m ³ /h/m ²)	9,81	14,13
SAND (Kg)	100	150
NET WEIGHT (Kg)	8,000	11,000

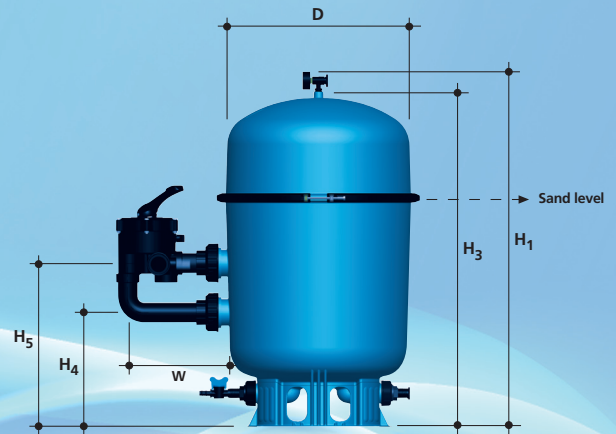

Quality Management System



We reserve the right to change all or part of the features of the articles or contents of this document, without prior notice.

DISTRIBUTOR: