

0531101

"Single Color Par 56" Underwater Lights




PRODUCT FEATURES

- Compatible with all PAR56 lamp sleeves on the market.
- It gives instant beam thanks to the LEDs used in the light.
- The light complies with IP68 protection degree at 2 m nominal depth.
- Diffuser glass is made of polycarbonate.
- Body part consists aluminum or white polycarbonate.
- The light operating voltage is very low (12V AC/DC), making it a Class III electrical device.
- Frame made of ABS plastic and Niche in white plastic.



VOLTAGE (V)	POWER (W)	CCT (K) Min	CCT (K) Typ	CCT (K) Max	Ø (lm) Min	Useful (lm flux)	CRI (Ra)	Light Intensity (cd)
12V AC/DC	20.4	6000	6500	7120	1404.8	1511	71,9	516.91 cd

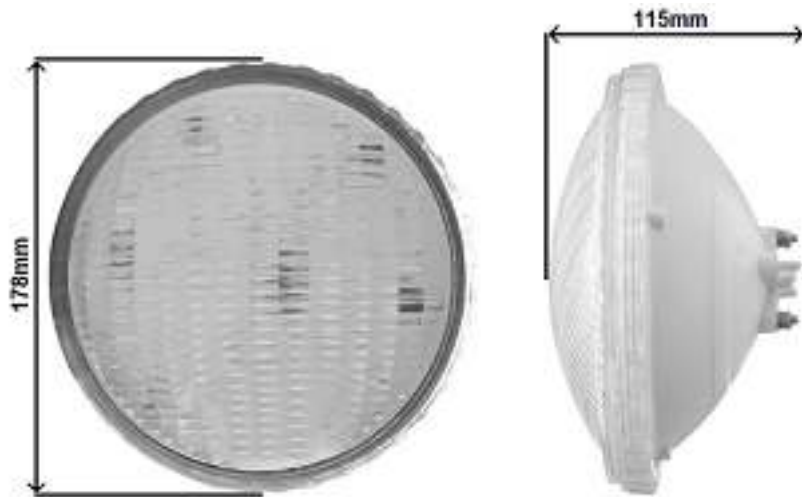

Note:

- 2θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.
- The above luminous flux measurement allowance tolerance is ±5%.
- The above Color Rendering Index measurement allowance tolerance is -2
- The above color coordinates measurement allowance tolerance is ±0.003.