

051181

“Mini Clicker Underwater Lights




PRODUCT FEATURES

- It has a special, elegant, stylish and patented design.
- It can be easily installed in all swimming pools.
- It gives instant beam thanks to the LEDs used in the light.
- Light scattering angle is 120 °.
- The light complies with IP68 protection degree at 2 m nominal depth.
- Diffuser glass is made of polycarbonate.
- Body part consists of gray PA6.
- The light operating voltage is very low (12V AC / DC), making it a Class III electrical device.
- Energy input cable length is 1 meter.



| VOLTAGE (V) | POWER (W) | CCT (K) Min | CCT (K) Typ | CCT (K) Max | Φ (lm) Min | Useful (lm flux) | CRI (Ra) | Light Intensity (cd) |
|-------------|-----------|-------------|-------------|-------------|------------|------------------|----------|----------------------|
| 12V AC/DC | 6.81 | 2800 | 3000 | 3100 | 468.7 lm | 508 lm | 83,3 | 192.04 cd |

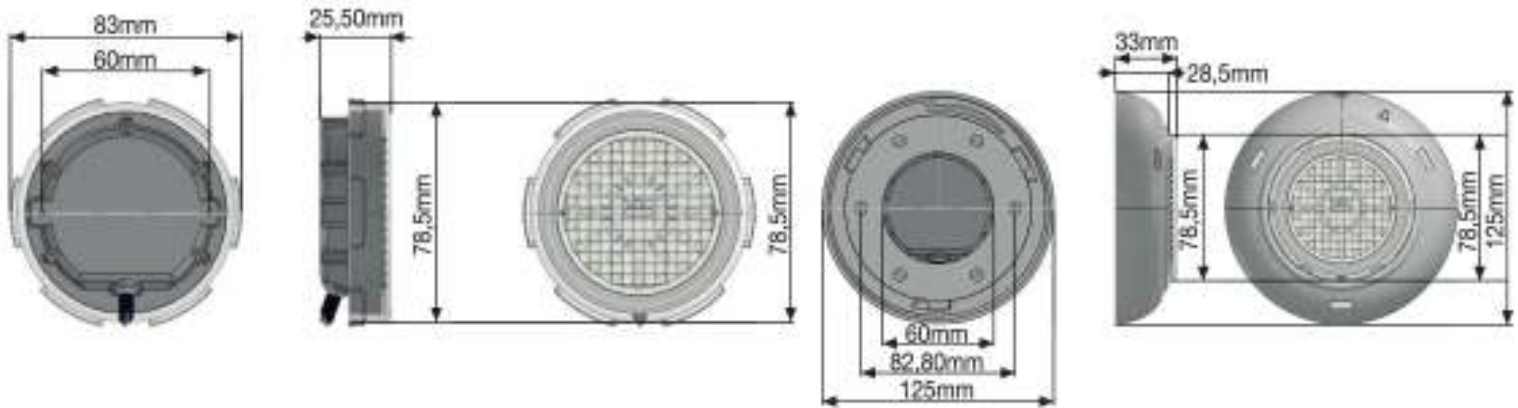

Note:

1. 2θ_{1/2} is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.
2. The above luminous flux measurement allowance tolerance is ±5%.
3. The above Color Rendering Index measurement allowance tolerance is -2
4. The above color coordinates measurement allowance tolerance is ±0.003.