

FiltrOne®

Sand Filters For Swimming Pools




Quality Management System





- **Filtrone Filters are made in PE plastic.**
- **One piece body gives extra strength to pressure fluctuations. Extra strong lid connections are provided by means of stainless steel bolts flanged together.**
- **Fitted with collector and collector arms made of PVC or ABS.**
- **Fitted with pressure gauge, manual air vent cock and manual water drain cock.**
- **Selector valve with "Filter, wash, rinse, recirculate, waste and closed" positions.**
- **Maximum working pressure 2 kg/cm²**
- **Testing pressure 3,5 kg/cm²**
- **Optional large lid (Ø 500 mm) facilitates easy access to filter.**

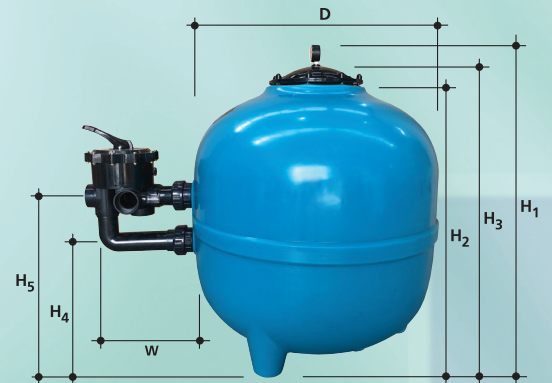

TECHNICAL CHARACTERISTICS

MODEL	021818	021813	021814	021815	021827	021823	021824	021825
D (mm)	560	615	760	920	560	615	760	920
H ₁ (mm)	730	805	925	1085	800	875	995	1155
H ₂ (mm)	610	685	825	965	610	685	825	965
H ₃ (mm)	670	745	885	1025	-	-	-	-
H ₄ (mm)	250	270	315	370	-	-	-	-
H ₅ (mm)	420	400	465	520	-	-	-	-
W (mm)	260	260	295	295	-	-	-	-
CONNECTIONS Ø (mm)	1 1/2"	1 1/2"	2"	2"	1 1/2"	1 1/2"	2"	2"
FLOW (m ³ /h) (50 m ³ /h/m ²)	12	15	22	32	12	15	22	32
SAND WEIGHT (Kg)	100	150	250	450	100	150	250	450
NET WEIGHT (Kg)	16,500	19,500	26,500	37,500	14,500	17,500	24,500	35,500



Quality Management System

We reserve the right to change all or part of the features of the articles or contents of this document, without prior notice.

DISTRIBUTOR: